



Download Catalog Pages (PDF)

Dimension	Ø6	Ø8	Ø10	Ø12	Ø16	Ø20				
Infeed in mm	ae= 0.05xD	ae= 0.05xD	ae= 0.05xD	ae= 0.05xD	ae= 0.05xD	ae= 0.05xD				
Application	ap= L2 max	ap= L2 max	ap= L2 max	ap= L2 max	ap= L2 max	ap= L2 max				

Material	Strength (N/mm ²)	Feed (mm/Z)	Strength							
			fz	fz	fz	fz	fz	fz	fz	
N		Vc (m/min)								
1.1	Aluminium, alloyed	<500	380	0.026	0.028	0.03	0.032	0.034	0.036	
1.2	Aluminium, alloyed	<600	360	0.026	0.028	0.03	0.032	0.034	0.036	
2.1-2.3	Aluminium, casted	<600	320	0.021	0.023	0.025	0.027	0.029	0.031	
3.1-3.3	Cooper, alloyed	<650	160	0.016	0.018	0.02	0.022	0.024	0.026	
4.1	Magnesium, alloyed	<250	350	0.026	0.028	0.03	0.032	0.034	0.036	
5.1	Thermoplastic	<100	300	0.021	0.023	0.025	0.027	0.029	0.031	
5.2	Duroplastic	<150	260	0.016	0.018	0.02	0.022	0.024	0.026	

NOTE | To achieve high surface quality, use ae=0.2mm for Ø6-10; ae=0.3mm for Ø12-20.

Cooling

Tolerance h6



Coating AlphaSlide Rainbow

Strategy **HPC**


Application

Features **HA** **≠** **5xD**

- Ultra-sharp and lapped cutting edges
 - Special chip chambers designed for the evacuation of extra long and fine chips
 - Face-Finish-bevel for smooth workpiece surfaces
-
- For excellent surfaces and maximum dimensional accuracy
-
- 6 cutting edges for highest feed rates

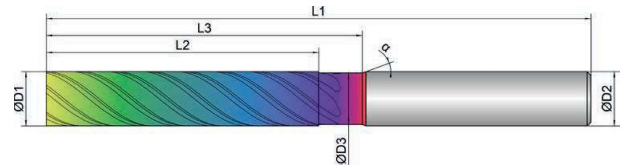

Roughing



Finishing



	D1	D3	L2	L3	L1	D2	z	α	α
EXN1-M04-0053	mm \varnothing	mm \varnothing	mm	mm	mm	mm \varnothing	#	°	°
6	6.0	5.8	30.0	38.0	75.0	6.0	6	39	20
8	8.0	7.8	40.0	48.0	80.0	8.0	6	39	20
10	10.0	9.5	50.0	58.0	100.0	10.0	6	39	20
12	12.0	11.5	60.0	68.0	120.0	12.0	6	39	20
16	16.0	15.5	80.0	88.0	134.0	16.0	6	39	20
20	20.0	19.5	100.0	108.0	175.0	20.0	6	39	20