



Download Catalog Pages (PDF)

Material	Strength (N/mm ²)	Feed (mm/Z)	Ø0.2x0.5		Ø0.2x1.5		Ø0.3x1		Ø0.3x2		Ø0.4x2		Ø0.4x3		
			ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.18xD	ae=0.2xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.18xD	ae=0.23xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.18xD	ae=0.23xD ap=L2 max	
N		Vc (m/min)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	
1.1	Aluminium, alloyed	<500	500	0.008	0.012	0.007	0.011	0.012	0.016	0.011	0.015	0.012	0.016	0.011	0.015
1.2	Aluminium, alloyed	<600	480	0.008	0.012	0.007	0.011	0.012	0.016	0.011	0.015	0.012	0.016	0.011	0.015
2.1-2.3	Aluminium, casted	<600	450	0.007	0.011	0.006	0.01	0.011	0.015	0.01	0.014	0.011	0.015	0.01	0.014
3.1-3.3	Cooper, alloyed	<650	220	0.006	0.01	0.005	0.009	0.01	0.014	0.009	0.013	0.01	0.014	0.009	0.013
4.1	Magnesium, alloyed	<250	500	0.008	0.012	0.007	0.011	0.012	0.016	0.011	0.015	0.012	0.016	0.011	0.015
5.1	Thermoplastic	<100	400	0.007	0.011	0.006	0.01	0.011	0.015	0.01	0.014	0.011	0.015	0.01	0.014
5.2	Duroplastic	<150	350	0.006	0.01	0.005	0.009	0.01	0.014	0.009	0.013	0.01	0.014	0.009	0.013

Material	Strength (N/mm ²)	Feed (mm/Z)	Ø0.5x2		Ø0.5x6		Ø0.6x2		Ø0.6x6		Ø0.7x2		Ø0.7x4		
			ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.1xD	ae=0.12xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.1xD	ae=0.12xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.18xD	ae=0.23xD ap=L2 max	
N		Vc (m/min)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	
1.1	Aluminium, alloyed	<500	500	0.016	0.02	0.013	0.017	0.016	0.02	0.013	0.017	0.016	0.02	0.015	0.018
1.2	Aluminium, alloyed	<600	480	0.016	0.02	0.013	0.017	0.016	0.02	0.013	0.017	0.016	0.02	0.015	0.018
2.1-2.3	Aluminium, casted	<600	450	0.015	0.018	0.012	0.015	0.015	0.018	0.012	0.015	0.015	0.018	0.014	0.016
3.1-3.3	Cooper, alloyed	<650	220	0.014	0.016	0.011	0.013	0.014	0.016	0.011	0.013	0.014	0.016	0.013	0.014
4.1	Magnesium, alloyed	<250	500	0.016	0.02	0.013	0.017	0.016	0.02	0.013	0.017	0.016	0.02	0.015	0.018
5.1	Thermoplastic	<100	400	0.015	0.018	0.012	0.015	0.015	0.018	0.012	0.015	0.015	0.018	0.014	0.016
5.2	Duroplastic	<150	350	0.014	0.016	0.011	0.013	0.014	0.016	0.011	0.013	0.014	0.016	0.013	0.014

Material	Strength (N/mm ²)	Feed (mm/Z)	Ø0.8x4		Ø0.8x8		Ø1x4		Ø1x25		Ø1.2x6		Ø1.2x10		
			ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.16xD	ae=0.2xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.025xD	ae=0.025xD ap=L2 max	ae=1xD ap=0.2xD	ae=0.25xD ap=L2 max	ae=1xD ap=0.16xD	ae=0.2xD ap=L2 max	
N		Vc (m/min)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	
1.1	Aluminium, alloyed	<500	500	0.018	0.022	0.016	0.02	0.025	0.03	0.015	0.02	0.025	0.03	0.023	0.028
1.2	Aluminium, alloyed	<600	480	0.018	0.022	0.016	0.02	0.025	0.03	0.015	0.02	0.025	0.03	0.023	0.028
2.1-2.3	Aluminium, casted	<600	450	0.016	0.02	0.014	0.018	0.022	0.027	0.013	0.018	0.022	0.027	0.02	0.025
3.1-3.3	Cooper, alloyed	<650	220	0.014	0.018	0.012	0.016	0.019	0.024	0.011	0.016	0.019	0.024	0.017	0.022
4.1	Magnesium, alloyed	<250	500	0.018	0.022	0.016	0.02	0.025	0.03	0.015	0.02	0.025	0.03	0.023	0.028
5.1	Thermoplastic	<100	400	0.016	0.02	0.014	0.018	0.022	0.027	0.013	0.018	0.022	0.027	0.02	0.025
5.2	Duroplastic	<150	350	0.014	0.018	0.012	0.016	0.019	0.024	0.011	0.016	0.019	0.024	0.017	0.022

NOTE | Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

Material	Strength (N/mm ²)	Feed (mm/Z)	Ø 1.4x6		Ø 1.4x8		Ø 1.5x6		Ø 1.5x25		Ø 1.6x6		Ø 1.6x10		
			ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.18xD fz	ae= 0.23xD ap= L2 max fz	ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.03xD fz	ae= 0.04xD ap= L2 max fz	ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.18xD fz	ae= 0.23xD ap= L2 max fz	
N		Vc (m/min)													
1.1	Aluminium, alloyed	<500	500	0.025	0.03	0.024	0.028	0.025	0.03	0.018	0.023	0.03	0.035	0.028	0.033
1.2	Aluminium, alloyed	<600	480	0.025	0.03	0.024	0.028	0.025	0.03	0.018	0.023	0.03	0.035	0.028	0.033
2.1-2.3	Aluminium, casted	<600	450	0.022	0.027	0.021	0.025	0.022	0.027	0.015	0.02	0.027	0.031	0.025	0.03
3.1-3.3	Cooper, alloyed	<650	220	0.019	0.024	0.018	0.022	0.019	0.024	0.012	0.017	0.024	0.027	0.022	0.027
4.1	Magnesium, alloyed	<250	500	0.025	0.03	0.024	0.028	0.025	0.03	0.018	0.023	0.03	0.035	0.028	0.033
5.1	Thermoplastic	<100	400	0.022	0.027	0.021	0.025	0.022	0.027	0.015	0.02	0.027	0.031	0.025	0.03
5.2	Duroplastic	<150	350	0.019	0.024	0.018	0.022	0.019	0.024	0.012	0.017	0.024	0.027	0.022	0.027

Material	Strength (N/mm ²)	Feed (mm/Z)	Ø 1.8x6		Ø 1.8x10		Ø 2x6		Ø 2x35		Ø 2.5x8		Ø 2.5x30		
			ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.18xD fz	ae= 0.23xD ap= L2 max fz	ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.02xD fz	ae= 0.025xD ap= L2 max fz	ae= 1xD ap= 0.2xD fz	ae= 0.25xD ap= L2 max fz	ae= 1xD ap= 0.06xD fz	ae= 0.08xD ap= L2 max fz	
N		Vc (m/min)													
1.1	Aluminium, alloyed	<500	500	0.03	0.035	0.028	0.033	0.03	0.035	0.018	0.023	0.035	0.04	0.023	0.028
1.2	Aluminium, alloyed	<600	480	0.03	0.035	0.028	0.033	0.03	0.035	0.018	0.023	0.035	0.04	0.023	0.028
2.1-2.3	Aluminium, casted	<600	450	0.027	0.031	0.025	0.03	0.027	0.031	0.015	0.02	0.03	0.035	0.02	0.025
3.1-3.3	Cooper, alloyed	<650	220	0.024	0.027	0.022	0.027	0.024	0.027	0.012	0.017	0.025	0.03	0.017	0.022
4.1	Magnesium, alloyed	<250	500	0.03	0.035	0.028	0.033	0.03	0.035	0.018	0.023	0.035	0.04	0.023	0.028
5.1	Thermoplastic	<100	400	0.027	0.031	0.025	0.03	0.027	0.031	0.015	0.02	0.03	0.035	0.02	0.025
5.2	Duroplastic	<150	350	0.024	0.027	0.022	0.027	0.024	0.027	0.012	0.017	0.025	0.03	0.017	0.022

NOTE | Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

Cooling

Tolerance d04

Coating AlphaSlide Rainbow


Strategy **HSC**

Application


Features **HA**



- Optimized face geometry for excellent surfaces
- Defined microbevel for support and stabilization
- Polished chip space for ideal chip evacuation



- Tolerance D1: -0.001/-0.006 mm
- Tolerance D3: 0/-0.02 mm

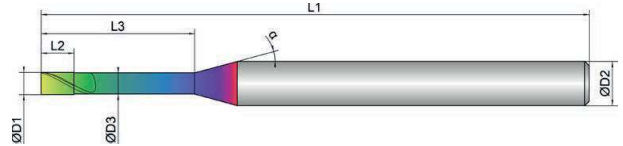










Roughing












Finishing



	D1	D3	L2	L3	L1	D2	z		α
EXN1-M15-0003	 mm \varnothing	 mm \varnothing	 mm	 mm	 mm	 mm \varnothing	 #	 °	 °
0,2X0,5	0.2	0.18	0.3	0.5	45.0	4.0	2	30	16
0,2X1	0.2	0.18	0.3	1.0	45.0	4.0	2	30	16
0,2X1,5	0.2	0.18	0.3	1.5	45.0	4.0	2	30	16
0,3X1	0.3	0.28	0.4	1.0	45.0	4.0	2	30	16
0,3X2	0.3	0.28	0.4	2.0	45.0	4.0	2	30	16
0,4X2	0.4	0.38	0.6	2.0	45.0	4.0	2	30	16
0,4X3	0.4	0.38	0.6	3.0	45.0	4.0	2	30	16
0,5X2	0.5	0.48	0.7	2.0	45.0	4.0	2	30	16
0,5X4	0.5	0.48	0.7	4.0	45.0	4.0	2	30	16
0,5X6	0.5	0.48	0.7	6.0	45.0	4.0	2	30	16
0,6X2	0.6	0.58	0.9	2.0	45.0	4.0	2	30	16
0,6X4	0.6	0.58	0.9	4.0	45.0	4.0	2	30	16
0,6X6	0.6	0.58	0.9	6.0	45.0	4.0	2	30	16
0,7X2	0.7	0.68	1.0	2.0	45.0	4.0	2	30	16

EXN1-M15-0003	D1	D3	L2	L3	L1	D2	z		α
	 mm \varnothing	 mm \varnothing	 mm	 mm	 mm	 mm \varnothing	 #	 °	 °
0,7X4	0.7	0.68	1.0	4.0	45.0	4.0	2	30	16
0,8X4	0.8	0.78	1.2	4.0	45.0	4.0	2	30	16
0,8X6	0.8	0.78	1.2	6.0	45.0	4.0	2	30	16
0,8X8	0.8	0.78	1.2	8.0	45.0	4.0	2	30	16
1X4	1.0	0.95	1.5	4.0	45.0	4.0	2	30	16
1X6	1.0	0.95	1.5	6.0	45.0	4.0	2	30	16
1X8	1.0	0.95	1.5	8.0	45.0	4.0	2	30	16
1X10	1.0	0.95	1.5	10.0	45.0	4.0	2	30	16
1X12	1.0	0.95	1.5	12.0	45.0	4.0	2	30	16
1X14	1.0	0.95	1.5	14.0	45.0	4.0	2	30	16
1X16	1.0	0.95	1.5	16.0	50.0	4.0	2	30	16
1X25	1.0	0.95	1.5	25.0	70.0	4.0	2	30	16
1,2X6	1.2	1.14	1.8	6.0	45.0	4.0	2	30	16
1,2X8	1.2	1.14	1.8	8.0	45.0	4.0	2	30	16
1,2X10	1.2	1.14	1.8	10.0	45.0	4.0	2	30	16
1,4X6	1.4	1.34	2.1	6.0	45.0	4.0	2	30	16
1,4X8	1.4	1.34	2.1	8.0	45.0	4.0	2	30	16
1,5X6	1.5	1.44	2.3	6.0	45.0	4.0	2	30	16
1,5X8	1.5	1.44	2.3	8.0	45.0	4.0	2	30	16
1,5X10	1.5	1.44	2.3	10.0	45.0	4.0	2	30	16
1,5X12	1.5	1.44	2.3	12.0	45.0	4.0	2	30	16
1,5X14	1.5	1.44	2.3	14.0	50.0	4.0	2	30	16
1,5X16	1.5	1.44	2.3	16.0	50.0	4.0	2	30	16
1,5X20	1.5	1.44	2.3	20.0	54.0	4.0	2	30	16
1,5X25	1.5	1.44	2.3	25.0	70.0	4.0	2	30	16

EXN1-M15-0003	D1	D3	L2	L3	L1	D2	z		α
	 mm ∅	 mm ∅	 mm	 mm	 mm	 mm ∅	 #	 °	 °
1,6X6	1.6	1.51	2.4	6.0	45.0	4.0	2	30	16
1,6X10	1.6	1.51	2.4	10.0	45.0	4.0	2	30	16
1,8X6	1.8	1.71	2.7	6.0	45.0	4.0	2	30	16
1,8X8	1.8	1.71	2.7	8.0	45.0	4.0	2	30	16
1,8X10	1.8	1.71	2.7	10.0	45.0	4.0	2	30	16
2X6	2.0	1.91	3.0	6.0	45.0	4.0	2	30	16
2X8	2.0	1.91	3.0	8.0	45.0	4.0	2	30	16
2X10	2.0	1.91	3.0	10.0	45.0	4.0	2	30	16
2X12	2.0	1.91	3.0	12.0	45.0	4.0	2	30	16
2X14	2.0	1.91	3.0	14.0	50.0	4.0	2	30	16
2X16	2.0	1.91	3.0	16.0	50.0	4.0	2	30	16
2X20	2.0	1.91	3.0	20.0	54.0	4.0	2	30	16
2X25	2.0	1.91	3.0	25.0	60.0	4.0	2	30	16
2X30	2.0	1.91	3.0	30.0	70.0	4.0	2	30	16
2X35	2.0	1.91	3.0	35.0	80.0	4.0	2	30	16
2,5X8	2.5	2.41	3.7	8.0	45.0	4.0	2	30	16
2,5X12	2.5	2.41	3.7	12.0	45.0	4.0	2	30	16
2,5X16	2.5	2.41	3.7	16.0	50.0	4.0	2	30	16
2,5X20	2.5	2.41	3.7	20.0	54.0	4.0	2	30	16
2,5X25	2.5	2.41	3.7	25.0	60.0	4.0	2	30	16
2,5X30	2.5	2.41	3.7	30.0	70.0	4.0	2	30	16



STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem - simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST

